


Wake-up lamp

cut line —
fold line —
size: 420x140 mm
color: 1+1

dreamTime

МУЛЬТИМЕДИЙНАЯ СТАНЦИЯ ДЛЯ ГАРМОНИЧНОГО СНА

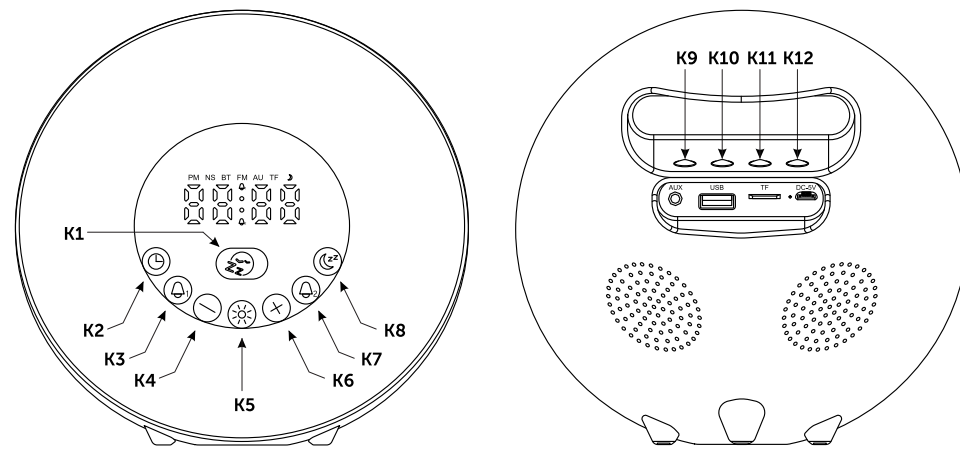

Руководство по эксплуатации

Подключите кабель питания к разъему Micro USB и подсоедините лампу к розетке. Рекомендуется полностью зарядить батарею перед первым использованием. Все перечисленные ниже функции недоступны, если батарея разряжена.

Сенсорные клавиши

K1 Клавиша «Отложить»: однократное нажатие на клавишу откладывает повторный звонок будильника на 9 минут. В это же время яркость лампы автоматически постепенно увеличивается для пробуждения светом. В том случае, если будильник не отключается пользователем в течение трех минут, он автоматически отключается на 9 минут и повторяется еще три раза.

K2 Клавиша «Часы»
• Долгое нажатие: переключение времени на 12-ти и 24-х часовой формат;
• Нажатие: активация режима установки времени (следует нажать один раз для установки часов, два раза — для установки минут, три раза — для завершения установки времени);
• Для изменения значений времени следует нажимать клавиши «+/-».

K3 Клавиша «Будильник 1»
• Долгое нажатие: активация/деактивация будильника, отключение звука во время звонка будильника;
• Нажатие: активация режима установки времени и сигнала будильника (следует нажать один раз для установки часов, два раза — для установки минут, три раза для выбора мелодии, четыре раза — для завершения установки будильника);
• Для изменения значений времени и мелодии следует нажимать клавиши «+/-».

K4 Клавиша «Минус»: используется для изменения значений времени и мелодий.

K5 Клавиша «Свет»
• Нажатие: активация режима выбора яркости/цвета лампы (следует нажать один раз для установки яркости, два раза — для выбора цвета лампы, три раза — для отключения лампы);
• Для изменения яркости и выбора цвета следует нажимать клавиши «+/-».

K6 Клавиша «Плюс»: используется для изменения значений времени и мелодий.

K7 Клавиша «Будильник 2»: возможность установить второй будильник. Функционал аналогичен клавише «Будильник 1».

K8 Клавиша «Засыпание»
• Нажатие активирует режим «засыпание с закатом» продолжительностью 30/60/90 минут;
• Долгое нажатие: деактивация режима «засыпание с закатом».

Клавиши управления

K9 Клавиша «◀»: переключение на предыдущую песню, уменьшение звука в режиме прослушивания музыки/FM-радио.

K10 Клавиша «Старт/Пауза/Возобновление»
• Старт/Пауза/Возобновление воспроизведения;
• Ответ на телефонный вызов в режиме Bluetooth;
• Автопоиск и сохранение станций в режиме FM-радио.

K11 Клавиша «▶»: переключение на следующую песню, увеличение звука в режиме прослушивания музыки/FM-радио.

K12 Клавиша «Mode»
• Длительное нажатие: включение/выключение устройства;
• Короткое нажатие: переключение между режимами воспроизведения встроенных звуков, Bluetooth, FM-радио, внешним аудио, картой памяти.

Режимы

- Встроенные звуки — воспроизведение встроенных звуков;
- Bluetooth — подключение к стороннему устройству через Bluetooth;
- FM-радио — воспроизведение радиостанций в FM диапазоне;
- Внешнее аудио — подключение аудиоустройств;
- Карта памяти — воспроизведение музыки с карты памяти.

Разъемы

- AUX: разъем для подключения внешних устройств (смартфон/MP3-плеер) через кабель 3,5 мм;
- USB: разъем для подключения внешних карт памяти;
- TF: разъем для карт памяти формата Micro SD/SDHC;
- DC-5 V: разъем Micro USB для зарядки.

Функционал

Лампа

- Нажмите сенсорную клавишу управления (K5) один раз для настройки яркости натурального света;
- Нажмите сенсорную клавишу управления (K5) два раза для выбора цвета лампы вместо натурального света (доступно шесть дополнительных цветов);
- Нажмите сенсорную клавишу управления (K5) три раза для выключения лампы;
- Для изменения яркости и выбора цвета, следует нажимать клавиши «+/-».

Соединение с колонкой по Bluetooth

- Активируйте режим Bluetooth на лампе;
- Активируйте Bluetooth вашего устройства (смартфон, ноутбук и т. д.) и откройте видимость для других гаджетов;
- Начните поиск доступных устройств;
- Подключитесь к лампе dreamTime из списка доступных устройств;
- Введите пароль или PIN-код 0000 (при необходимости) и нажмите «Да» или «Подтвердить»;
- После подключения можно проигрывать музыку через динамик лампы.

Габариты

Размер: 160x100x160 мм
Вес: 700 г


Комплектность: лампа, USB кабель, зарядное устройство, кабель 3,5 мм, руководство по эксплуатации.

EAC Сделано в Китае

indivo

dreamTime

MULTIMEDIA STATION FOR HARMONIOUS SLEEP

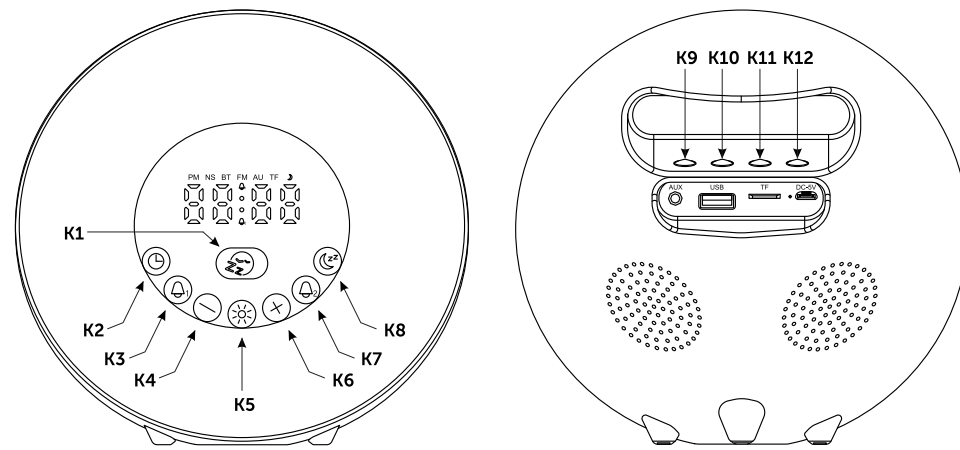

User Manual

Insert the power cable to the Micro USB socket and connect a lamp to the power socket. It is recommended to fully charge the battery before the first usage. All the functions listed below are not available if the battery is out of power.

Sensor keys

K1 Snooze button: short press this button to enter snooze mode when alarm rings, the alarm rings again after 9 minutes. The LED light automatically increases to ensure the wake-up with the light feature. The unit enters snooze mode automatically if the alarm rings 3 minutes without any operation, the cycle repeats three times at most.

K2 Clock button
• Long press: toggle 12 or 24 hour-format.
• Short press: enter to HOUR/MIN setting mode (short press one time activates hours set-up, short press two times activates minutes set-up, short press three times finalizes clock setting).
• To change HOUR and MINUTE digits short press "+/-" buttons.

K3 Alarm Clock 1 button
• Long press: alarm activation/deactivation, turn off the alarm sound when alarm rings.
• Short press: enter to HOUR/MIN/BUILT-IN SOUND setting mode (short press one time activates hours set-up, short press two times activates minutes set-up, short press three times activates built-in sound selection mode, short press four times finalizes alarm clock setting).
• To change HOUR/MIN/BUILT-IN SOUND, short press "+/-" buttons.

K4 Minus button: use it to change HOUR/MIN/BUILT-IN SOUND values.

K5 Light button
• Short press: enter to light brightness/light color setting mode (short press one time activates light brightness set-up, short press two times activates light color set-up, short press three times turn of the lamp).
• To change light brightness/light color setting short press "+/-" buttons.

K6 Plus button: use it to change HOUR/MIN/BUILT-IN SOUND values.

K7 Alarm clock 2 button: you can set an additional alarm, all functions are same to Alarm 1 button.

K8 Sleep mode button
• Short press: enter sunset sleep light mode, with timer options of 30/60/90 min.
• Long press: sunset sleep light mode deactivation.

Functional Keys

K9 Button «◀»: switches PREVIOUS song, decreases the volume in music/FM-mode.

K10 Start/pause/resume button
• START/PAUSE/RESUME play.
• Answer the phone call in Bluetooth mode.
• Auto search and store FM-radio stations in FM-radio mode.

K11 Button «▶»: switches NEXT song, decreases the volume in music/FM-mode.

K12 Mode button
• Long press: device power off/on.
• Short press: switches between Built-in sounds/Bluetooth/FM-radio/AUX IN/TF CARD.

Modes

- Built-in sounds — default built-in sounds playing mode.
- Bluetooth — pairing with Bluetooth device.
- FM-radio — FM-radio playing mode.
- AUX IN — AUX connection mode.
- TF CARD — playing music from the memory card.

Sockets

- AUX: port for the AUX connection with the smartphone or MP3 player via 3.5 mm cable.
- USB: port for the connection of the external USB memory card.
- TF: slot for the connection of the external Micro SD/SDHC memory card.
- DC-5 V: Micro USB port for the charging.

Functions

LED lighting

- Press the touch sensor key (K5) once to regulate a natural light brightness.
- Press the touch sensor key (K5) two times to select the LED color instead the default natural light (device have six different additional colors).
- Press the touch sensor key (K5) three times to switch off the lamp.
- To change light brightness/light color setting, short press "+/-" buttons.

Bluetooth pairing with a speaker

- Activate Bluetooth mode of the wake-up lamp.
- Activate Bluetooth of your device (smartphone, laptop, etc.) and make it visible for other gadgets.
- Start available devices search.
- Pair with dreamTime from available Bluetooth devices list.
- Enter a password or PIN 0000 (if necessary) and press "Yes" or "Confirm".
- Now you can start playing music via the wake-up lamp speaker.

Dimensions

Size: 160x100x160 mm
Weight: 700 g

Package contents: lamp, USB cable, power adapter, 3.5 mm jack cable, user manual.

EAC Made in China

indivo